


ADJUST FROM 6" TO 105" (FULLY STRETCHED)

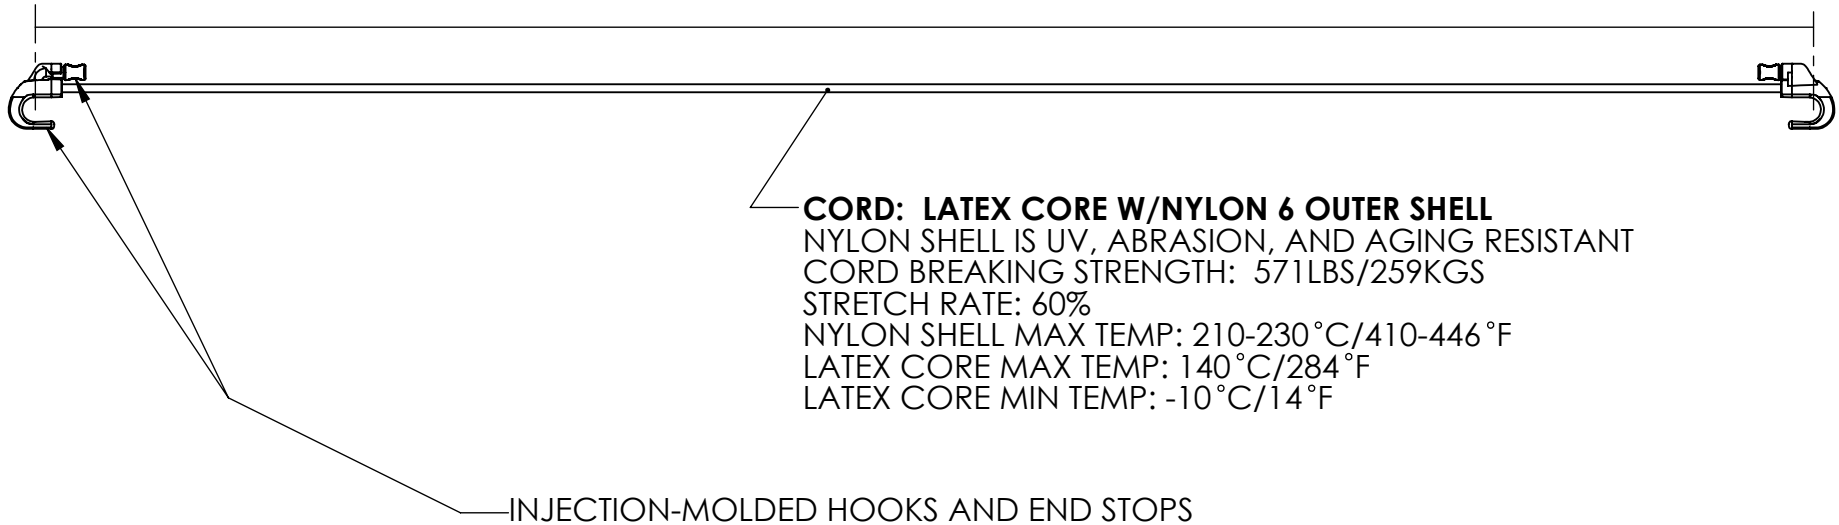

CORD: LATEX CORE W/NYLON 6 OUTER SHELL
 NYLON SHELL IS UV, ABRASION, AND AGING RESISTANT
 CORD BREAKING STRENGTH: 571LBS/259KGS
 STRETCH RATE: 60%
 NYLON SHELL MAX TEMP: 210-230 °C/410-446 °F
 LATEX CORE MAX TEMP: 140 °C/284 °F
 LATEX CORE MIN TEMP: -10 °C/14 °F

INJECTION-MOLDED HOOKS AND END STOPS

72" MONKEY FINGER

**BUNGEE LOAD RATING:
 70LBS @ 105 INCHES FULLY STRETCHED
 (WHEN CORD IS FOLDED
 BACK PROPERLY INTO HOOK)**

DURA DURA PLASTICS PRODUCTS
 533E Third Street Beaumont CA 92223
 Phone:(951)845-3161 Fax:(951)845-7644

File Name :Monkey Finger bungee cord BNG72		NAME	DATE
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DURA PLASTIC PRODUCTS . ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DURA PLASTIC PRODUCTS IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/32 ANGULAR: ± 1/2° TWO PLACE DECIMAL ±.010 THREE PLACE DECIMAL ±.005	DRAWN	JACK VAN GOSSEN 12/15/14
		CHECKED	
		ENG APPR.	
		MFG APPR.	

SIZE	Description:	
A	72" MONKEY FINGER TECH SPECS	
SCALE: 1:12	REV : .03	SHEET 1 OF 1